


MODEL 125

STANDARD CURB MOUNT

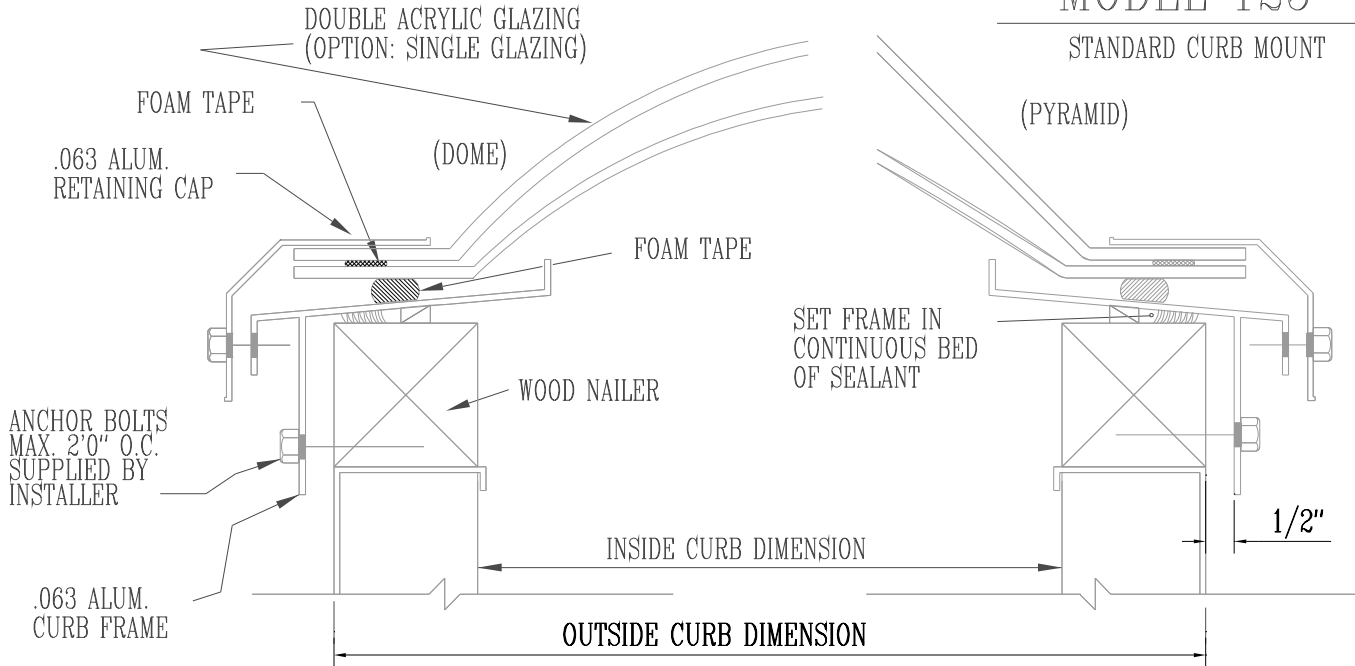

MODEL NO.	O.C.D.	I.C.D.	ACRYLIC COLOR EXT.	INT.	QTY.	PROJECT INFORMATION
2020	17 1/4 x 17 1/4	14 1/4 x 14 1/4				Customer:
2028	17 1/4 x 25 1/4	14 1/4 x 22 1/4				Job name:
2052	17 1/4 x 49 1/4	14 1/4 x 46 1/4				Location:
2424	22 x 22	19 x 19				Ship to:
2448	22 x 46	19 x 43				
2828	25 1/4 x 25 1/4	22 1/4 x 22 1/4				Representative:
2836	25 1/4 x 33 1/4	22 1/4 x 30 1/4				Phone:
2852	25 1/4 x 49 1/4	22 1/4 x 46 1/4				Fax:
2876	25 1/4 x 72 1/2	22 1/4 x 69 1/2				
2896	25 1/4 x 92 1/2	22 1/4 x 89 1/2				
3636	33 1/4 x 33 1/4	30 1/4 x 30 1/4				<input type="checkbox"/> Dome/dome
3652	33 1/4 x 49 1/4	30 1/4 x 46 1/4				<input type="checkbox"/> Single dome
3676	33 1/4 x 72 1/2	30 1/4 x 69 1/2				<input type="checkbox"/> Pyramid/pyramid
3696	33 1/4 x 92 1/2	30 1/4 x 89 1/2				<input type="checkbox"/> Single pyramid
4242	40 x 40	37 x 37				<input type="checkbox"/> Pyramid/dome
4280	40 x 78	37 x 75				<input type="checkbox"/> With curb liner
4364	41 x 62	38 x 59				<input type="checkbox"/> Without curb liner
4848	46 x 46	43 x 43				<input type="checkbox"/> With insulation
5252	49 1/4 x 49 1/4	46 1/4 x 46 1/4				<input type="checkbox"/> Without insulation
5276	49 1/4 x 72 1/2	46 1/4 x 69 1/2				Finish:
5296	49 1/4 x 92 1/2	46 1/4 x 89 1/2				
6060	58 x 58	55 x 55				
6476	60 1/2 x 72 1/2	57 1/2 x 69 1/2				
6496	60 1/2 x 92 1/2	57 1/2 x 89 1/2				
7676	72 1/2 x 72 1/2	69 1/2 x 69 1/2				
7696	72 1/2 x 92 1/2	69 1/2 x 89 1/2				
8080	78 x 78	75 x 75				
9898	95 1/2 x 95 1/2	92 1/2 x 92 1/2				
Other						

SKYLIGHT INFORMATION

- Dome/dome
- Single dome
- Pyramid/pyramid
- Single pyramid
- Pyramid/dome
- With curb liner
- Without curb liner
- With insulation
- Without insulation

SHORT FORM SPECIFICATIONS

Dimensions shall be as shown. Domes shall be thermoformed from name brand cast acrylic sheet either white translucent, solar bronze, gray or clear colorless. Curb frame and retaining ring shall be fabricated from 6063-T5 extruded aluminum with a minimum thickness of .063". Units are designed and manufactured to meet or exceed AAMA voluntary standards of 40 psf live load and 20 psf wind (uplift). Skylight shall be supplied complete, ready for attachment to roof.

APPROVAL

Signature: